

Numerical methods for solving the time-dependent Maxwell equations*

H. De Raedt[†], J.S. Kole[‡], K.F.L. Michielsen[§], M.T. Figge[¶]

*Applied Physics - Computational Physics**,*

Materials Science Centre

University of Groningen, Nijenborgh 4

NL-9747 AG Groningen, The Netherlands

(Dated: February 2, 2008)

We review some recent developments in numerical algorithms to solve the time-dependent Maxwell equations for systems with spatially varying permittivity and permeability. We show that the Suzuki product-formula approach can be used to construct a family of unconditionally stable algorithms, the conventional Yee algorithm, and two new variants of the Yee algorithm that do not require the use of the staggered-in-time grid. We also consider a one-step algorithm, based on the Chebyshev polynomial expansion, and compare the computational efficiency of the one-step, the Yee-type, the alternating-direction-implicit, and the unconditionally stable algorithms. For applications where the long-time behavior is of main interest, we find that the one-step algorithm may be orders of magnitude more efficient than present multiple time-step, finite-difference time-domain algorithms.

PACS numbers: 02.60.Cb, 03.50.De, 41.20.Jb

I. INTRODUCTION

The Maxwell equations describe the evolution of electromagnetic (EM) fields in space and time [1]. They apply to a wide range of different physical situations and play an important role in a large number of engineering applications. In many cases, numerical methods are required to solve Maxwell's equations [2, 3]. A well-known class of algorithms is based on a method proposed by Yee [4]. This finite-difference time-domain (FDTD) approach owes its popularity mainly due to its flexibility and speed while at the same time it is easy to implement [2, 3].

A limitation of Yee-based FDTD techniques is that their stability is conditional, depending on the mesh size of the spatial discretization and the time step of the time integration [2, 3]. Furthermore, in practice, the amount of computational work required to solve the time-dependent Maxwell equations by present FDTD techniques [2, 3, 5, 6, 7, 8, 9, 10, 11, 12] prohibits applications to a class of important fields such as bioelectromagnetics and VLSI design [2, 13, 14]. The basic reason for this is that the time step in the FDTD calculation has to be relatively small in order to maintain stability and a reasonable degree of accuracy in the time integration. Thus, the search for new algorithms that solve the Maxwell equation focuses on removing the conditional stability of FDTD methods and on improving the accuracy/efficiency of the algorithms.

A systematic approach to construct unconditionally stable algorithms is to employ a Suzuki product-formula [15] to approximate the time evolution operator [16]. In the case of EM fields, the latter is the matrix exponential of a skew-symmetric matrix and the approximations take the form of products of orthogonal transformations [11, 12]. The resulting numerical algorithms are unconditionally stable by construction [16, 17].

The spectral-domain split-operator technique proposed in Ref. [10] is one of the many forms that results from the use of the Lie-Trotter-Suzuki product formulas [15]. This technique makes use of Fast Fourier Transforms to compute the matrix exponentials of the displacement operators. The choice made in Ref. [10] yields an approximation to the time-evolution operator that is no longer orthogonal and hence unconditional stability is not automatically guaranteed [18]. In contrast, the methodology proposed in Refs. [11, 12] yields efficient, explicit, unconditionally stable schemes that operate on the EM fields defined on the real space grid only. These algorithms naturally allow for the spatial variations in both the permittivity and the permeability.

The Suzuki product-formula approach also provides a unified framework to construct and analyse other time stepping algorithms [16, 19]. To illustrate this point we show that the conventional Yee algorithm and the alternating-direction-implicit (ADI) time-stepping algorithms [6, 7, 8, 9, 19] fit into this framework. Furthermore we propose new variants of the Yee algorithm.

* Invited talk presented at the International Computational Accelerator Physics Conference 2002

[†] E-mail: deraedt@phys.rug.nl

[‡] E-mail: j.s.kole@phys.rug.nl

[§] E-mail: kristel@phys.rug.nl

[¶] E-mail: m.t.figge@phys.rug.nl

** <http://www.compphys.org>

Another route to improve upon the accuracy/efficiency of time-integration schemes is to make use of the Chebyshev polynomial expansions of the matrix exponential [20, 21, 22, 23, 24, 25]. In this paper we also discuss a one-step algorithm, based on Chebyshev polynomials, to solve the time-dependent Maxwell equations for (very) large time steps [26, 27].

The main purpose of this paper is to review the basic ideas behind the recent developments in numerical algorithms to solve the time-dependent Maxwell equations and to compare the virtues and shortcomings of the different methods. The plan of the paper is as follows. In Section II we briefly discuss the basic physical symmetries of the time-dependent Maxwell equations. The general framework to construct time-integration algorithms is laid out in Section III. We also pay attention to the numerical treatment of the current source term. In Section IV we use the simplest case of the time-dependent Maxwell equations to illustrate how the various algorithms can be implemented. We explicitly show how the conventional Yee algorithm naturally fits into this framework and, by minor modification, construct second-order and fourth-order time-accurate schemes that do not require the use of staggered-in-time fields, nor extra memory to store intermediate results. Then we recall the steps to construct the unconditionally stable algorithms proposed in Ref. [11, 12] and analyse a modification to improve the time-integration accuracy. Finally we discuss the implementation of the ADI and one-step algorithms. A discussion of the results of numerical experiments and our conclusions are given in Section V and VI respectively.

II. THEORY

We consider EM fields in linear, isotropic, nondispersive and lossless materials. The time evolution of EM fields in these systems is governed by the time-dependent Maxwell equations [1]. Some important physical symmetries of the Maxwell equations can be made explicit by introducing the fields

$$\mathbf{X}(t) \equiv \sqrt{\mu} \mathbf{H}(t) \quad \text{and} \quad \mathbf{Y}(t) \equiv \sqrt{\varepsilon} \mathbf{E}(t). \quad (1)$$

Here, $\mathbf{H}(t) = (H_x(\mathbf{r}, t), H_y(\mathbf{r}, t), H_z(\mathbf{r}, t))^T$ denotes the magnetic and $\mathbf{E}(t) = (E_x(\mathbf{r}, t), E_y(\mathbf{r}, t), E_z(\mathbf{r}, t))^T$ the electric field vector, while $\mu = \mu(\mathbf{r})$ and $\varepsilon = \varepsilon(\mathbf{r})$ denote, respectively, the permeability and the permittivity. In the absence of electric charges, Maxwell's curl equations [2] read

$$\frac{\partial}{\partial t} \begin{pmatrix} \mathbf{X}(t) \\ \mathbf{Y}(t) \end{pmatrix} = \mathcal{H} \begin{pmatrix} \mathbf{X}(t) \\ \mathbf{Y}(t) \end{pmatrix} - \frac{1}{\sqrt{\varepsilon}} \begin{pmatrix} 0 \\ \mathbf{J}(t) \end{pmatrix}, \quad (2)$$

where $\mathbf{J}(t) = (J_x(\mathbf{r}, t), J_y(\mathbf{r}, t), J_z(\mathbf{r}, t))^T$ represents the source of the electric field and $\mathcal{H}$ denotes the operator

$$\mathcal{H} \equiv \begin{pmatrix} 0 & -\frac{1}{\sqrt{\mu}} \nabla \times \frac{1}{\sqrt{\varepsilon}} \\ \frac{1}{\sqrt{\varepsilon}} \nabla \times \frac{1}{\sqrt{\mu}} & 0 \end{pmatrix}. \quad (3)$$

Writing $\mathbf{Z}(t) = (\mathbf{X}(t), \mathbf{Y}(t))^T$ it is easy to show that $\mathcal{H}$ is skew symmetric, i.e. $\mathcal{H}^T = -\mathcal{H}$, with respect to the inner product $\langle \mathbf{Z}(t) | \mathbf{Z}'(t) \rangle \equiv \int_V \mathbf{Z}^T(t) \cdot \mathbf{Z}'(t) d\mathbf{r}$, where V denotes the system's volume. In addition to Eq.(2), the EM fields also satisfy $\nabla \cdot (\sqrt{\mu} \mathbf{X}(t)) = 0$ and $\nabla \cdot (\sqrt{\varepsilon} \mathbf{Y}(t)) = 0$ [1]. Throughout this paper we use dimensionless quantities: We measure distances in units of λ and express time and frequency in units of λ/c and c/λ , respectively.

A numerical algorithm that solves the time-dependent Maxwell equations necessarily involves some discretization procedure of the spatial derivatives in Eq. (2). Ideally, this procedure should not change the basic symmetries of the Maxwell equations. We will not discuss the (important) technicalities of the spatial discretization (we refer the reader to Refs. [2, 3]) as this is not essential to the discussion that follows. On a spatial grid Maxwell's curl equations (2) can be written in the compact form [11]

$$\frac{\partial}{\partial t} \mathbf{\Psi}(t) = H \mathbf{\Psi}(t) - \mathbf{\Phi}(t). \quad (4)$$

The vector $\mathbf{\Psi}(t)$ is a representation of $\mathbf{Z}(t)$ on the grid. The matrix H is the discrete analogue of the operator (3), and the vector $\mathbf{\Phi}(t)$ contains all the information on the current source $\mathbf{J}(t)$. The formal solution of Eq. (4) is given by

$$\mathbf{\Psi}(t) = U(t) \mathbf{\Psi}(0) - \int_0^t U(t-u) \mathbf{\Phi}(u) du, \quad (5)$$

where

$$U(t) = e^{tH}, \quad (6)$$

denotes the time-evolution matrix. If the discretization procedure preserves the underlying symmetries of the time-dependent Maxwell equations then the matrix H is real and skew symmetric [11], implying that $U(t)$ is orthogonal [28]. Physically, the orthogonality of $U(t)$ implies conservation of energy [11].

III. TIME INTEGRATION ALGORITHMS

There are two, closely related, strategies to construct an algorithm for performing the time integration of the time-dependent Maxwell equations defined on the grid [17]. The traditional approach is to discretize (with increasing level of sophistication) the derivative with respect to time [17]. The other is to approximate the formally exact solution, i.e. the matrix exponential $U(t) = e^{tH}$ by some time evolution matrix $\tilde{U}(t)$ [16, 17]. We adopt the latter approach in this paper as it facilitates the construction of algorithms with specific features, such as unconditional stability [11, 16].

If the approximation $\tilde{U}(t)$ is itself an orthogonal transformation, then $\|\tilde{U}(t)\| = 1$ where $\|X\|$ denotes the 2-norm of a vector or matrix X [28]. In the absence of source terms (i.e. $\Phi(t) = \mathbf{0}$) this implies that $\|\tilde{\Psi}(t)\| = \|\tilde{U}(t)\Psi(0)\| = \|\Psi(0)\|$, for an arbitrary initial condition $\Psi(0)$ and for all times t and hence the time integration algorithm defined by $\tilde{U}(t)$ is unconditionally stable by construction [16, 17].

In the presence of current sources, for general $\tilde{U}(t)$, it follows immediately from Eq.(5) that

$$\|\tilde{\Psi}(t)\| \leq \|\Psi(t)\| + \tilde{\epsilon} \left(\|\Psi(0)\| + \int_0^t \|\Phi(u)\| du \right), \quad (7)$$

where $\|\tilde{U}(u) - U(u)\| \leq \tilde{\epsilon}$ for $0 \leq u \leq t$ and $\tilde{\epsilon}$ is a measure for the accuracy of the approximation $\tilde{U}(t)$.

From Eq.(5) it follows that the EM fields $\Psi(t)$ change according to

$$\Psi(t + \tau) = e^{\tau H} \Psi(t) - \int_t^{t+\tau} e^{(t+\tau-u)H} \Phi(u) du. \quad (8)$$

In the time-stepping approach we approximate the source term in Eq.(8) by the standard 3-point Gauss-Legendre quadrature formula [29]

$$\Psi(t + \tau) = e^{\tau H} \Psi(t) + \frac{\tau}{2} \sum_{i=0}^2 w_i e^{(1+x_i)\tau H/2} \Phi(t + (1+x_i)\tau/2) + \mathcal{O}(\tau^7), \quad (9)$$

where x_0, x_1, x_2 are the zeros of the Legendre polynomial $P_3(x) = x(5x^2 - 3)/2$ and $w_i = 8/(1 - x_i^2)(15x_i^2 - 3)^2$ [29]. In practice we replace $e^{(1+x_i)\tau H/2}$ in Eq.(9) by an approximation $\tilde{U}((1+x_i)\tau/2)$.

We now consider three options to construct the approximate time evolution matrix $\tilde{U}(t)$. We exclude from the discussion the exceptional cases for which the matrix exponential $U(t) = e^{tH}$ can be calculated directly, as these are usually of little relevance for realistic problems. The first approach yields the conventional Yee algorithm, a higher-order generalization thereof, and the unconditional schemes proposed in Ref.[11]. The second option is to use rational approximations to the exponential, yielding the standard ADI methods. Finally, the Chebyshev polynomial approximation to the matrix exponential is used to construct a one-step algorithm.

A. Suzuki product-formula approach

A systematic approach to construct approximations to matrix exponentials is to make use of the Lie-Trotter-Suzuki formula [15, 30]

$$e^{tH} = e^{t(H_1 + \dots + H_p)} = \lim_{m \rightarrow \infty} \left(\prod_{i=1}^p e^{tH_i/m} \right)^m, \quad (10)$$

and generalizations thereof [31, 32]. Expression Eq. (10) suggests that

$$U_1(\tau) = e^{\tau H_1} \dots e^{\tau H_p}, \quad (11)$$

might be a good approximation to $U(\tau)$ if τ is sufficiently small. Applied to the case of interest here, if all the H_i are real and skew-symmetric $U_1(\tau)$ is orthogonal by construction and a numerical scheme based on Eq. (11) will be unconditionally stable. For orthogonal matrices $U(\tau)$ and $U_1(\tau)$ it can be shown that [16]

$$\|U(\tau) - U_1(\tau)\| \leq \frac{\tau^2}{2} \sum_{i < j} \|[H_i, H_j]\|, \quad (12)$$

where $[H_i, H_j] = H_i H_j - H_j H_i$ is, in general, non-zero. Relaxing the condition that $U(\tau)$ and $U_1(\tau)$ are orthogonal matrices changes the τ dependence in Eq. (12) but for small τ the error still vanishes like τ^2 [32]. From Eq. (12) it follows that, in general, the Taylor series of $U(\tau)$ and $U_1(\tau)$ are identical up to first order in τ . We will call $U_1(\tau)$ a first-order approximation to $U(\tau)$.

The product-formula approach provides simple, systematic procedures to improve the accuracy of the approximation to $U(\tau)$ without changing its fundamental symmetries. For example the matrix

$$U_2(\tau) = U_1(-\tau/2)^T U_1(\tau/2) = e^{\tau H_p/2} \dots e^{\tau H_1/2} e^{\tau H_1/2} \dots e^{\tau H_p/2}, \quad (13)$$

is a second-order approximation to $U(\tau)$ [31, 32]. If $U_1(\tau)$ is orthogonal, so is $U_2(\tau)$. For orthogonal $U_2(\tau)$ we have

$$\|U(t) - [U_2(t/m)]^m\| \leq c_2 \tau^2 t, \quad (14)$$

where c_2 is a positive constant [16].

Suzuki's fractal decomposition approach [32] gives a general method to construct higher-order approximations based on $U_2(\tau)$ (or $U_1(\tau)$). A particularly useful fourth-order approximation is given by [32]

$$U_4(\tau) = U_2(a\tau) U_2(a\tau) U_2((1-4a)\tau) U_2(a\tau) U_2(a\tau), \quad (15)$$

where $a = 1/(4 - 4^{1/3})$. The approximations Eqs.(11) and (13), and (15) have proven to be very useful in many applications [15, 16, 31, 33, 34, 35, 36, 37, 38, 39, 40, 41] and, as we show below, turn out to be equally useful for solving the time-dependent Maxwell equations. As before, for orthogonal $U_4(\tau)$ we have [16]

$$\|U(t) - [U_4(t/m)]^m\| \leq c_4 \tau^4 t, \quad (16)$$

where c_4 is a positive constant.

As our numerical results (see below) show, for sufficiently small τ , the numerical error of a time integrator vanishes with τ according to the τ -dependence of the corresponding rigorous bound, e.g. Eqs.(12),(14), or (16). Our experience shows that if this behavior is not observed, there is a fair chance that the program contains one or more errors.

In practice an efficient implementation of the first-order scheme is all that is needed to construct the higher-order algorithms Eqs.(13) and (15). The crucial step of this approach is to choose the H_i 's such that the matrix exponentials $\exp(\tau H_1)$, ..., $\exp(\tau H_p)$ can be calculated efficiently. This will turn the formal expressions for $U_2(\tau)$ and $U_4(\tau)$ into efficient algorithms to solve the time-dependent Maxwell equations.

B. ADI algorithms

Instead of hunting for a decomposition that leads to matrix exponentials $\exp(\tau H_1)$, ..., $\exp(\tau H_p)$ that are easy to compute, one can opt for an algorithm in which each of these exponentials is calculated approximately. In principle this might be beneficial because there is more flexibility in decomposing H . The standard strategy, preserving the symmetry of H_1 , ..., H_p is to use rational (Padé) approximations to the exponential [17]. For instance, the approximation $e^x \approx (1+x/2)/(1-x/2)$ with some decomposition $H = H_1 + H_2$ yields the second-order-accurate ADI algorithm [17, 19, 42]

$$U_2^{ADI}(\tau) = (I - \tau H_1/2)^{-1} (I + \tau H_2/2) (I - \tau H_2/2)^{-1} (I + \tau H_1/2), \quad (17)$$

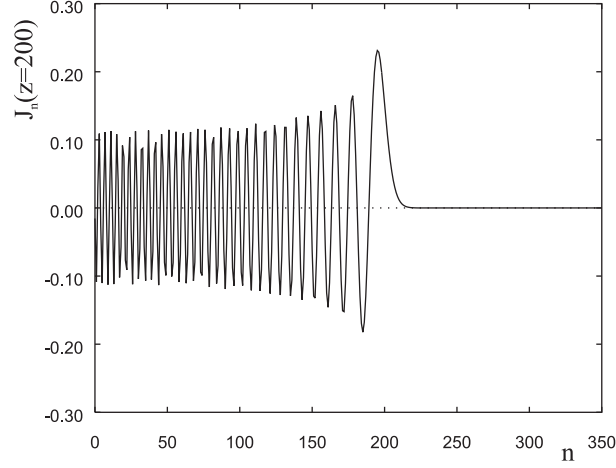


FIG. 1: Dependence of the Bessel function $J_n(z = 200)$ on the order n .

where I is the identity matrix. As the subscript indicates, the algorithm (17) is second-order accurate in time. For general skew-symmetric H_1 and H_2 , it is easy to show that the algorithm $U_2^{ADI}(\tau)$ is unconditionally stable. Following Ref. [19] we rearrange factors and obtain

$$\begin{aligned} \| [U_2^{ADI}(\tau)]^m \| &= \|(I - \tau H_1/2)^{-1} X_2 X_1 X_2 \dots X_1 X_2 (I + \tau H_1/2)\| \\ &\leq \|(I - \tau H_1/2)^{-1}\| \|X_2 X_1 X_2 \dots X_1 X_2\| \|(I + \tau H_1/2)\| = \|(I - \tau H_1/2)^{-1}\| \|(I + \tau H_1/2)\|. \end{aligned} \quad (18)$$

We used the fact that for skew-symmetric H_i , $X_i \equiv (I - \tau H_i/2)^{-1} (I + \tau H_i/2)$ is orthogonal and that $\|X_2 X_1 X_2 \dots X_1 X_2\|^2 = 1$. If X is skew-symmetric, its eigenvalues are pure imaginary and therefore $(I - X)^{-1}$ is non-singular. Hence, for any number of time steps m , $\| [U_2^{ADI}(\tau)]^m \| \leq C$, where C is some finite positive constant, proving that the $U_2^{ADI}(\tau)$ is unconditionally stable in the Lax-Richtmyer sense [17].

The matrix inversions appearing in Eq.(17) suggest that for practical purposes the implicit method $U_2^{ADI}(\tau)$ will not be very useful unless $I - \tau H_1/2$ and $I - \tau H_2/2$ take special forms that allow efficient matrix inversion [17, 42].

C. One-step algorithm

The basic idea of this approach is to make use of extremely accurate polynomial approximations to the matrix exponential. First we use the Chebyshev polynomial expansion to approximate $U(t)$ and then show how to treat the source term in Eq. (5). We begin by “normalizing” the matrix H . The eigenvalues of the skew-symmetric matrix H are pure imaginary numbers. In practice H is sparse so it is easy to compute $\|H\|_1 \equiv \max_j \sum_i |H_{i,j}|$. Then, by construction, the eigenvalues of $B \equiv -iH/\|H\|_1$ all lie in the interval $[-1, 1]$ [28]. Expanding the initial value $\Psi(0)$ in the (unknown) eigenvectors $\mathbf{b}_j$ of B , we find from Eq. (5) with $\Phi(t) \equiv 0$:

$$\Psi(t) = e^{izB} \Psi(0) = \sum_j e^{izb_j} \mathbf{b}_j \langle \mathbf{b}_j | \Psi(0) \rangle, \quad (19)$$

where $z = t\|H\|_1$ and the b_j denote the (unknown) eigenvalues of B . There is no need to know the eigenvalues and eigenvectors of B explicitly. We find the Chebyshev polynomial expansion of $U(t)$ by computing the expansion coefficients of each of the functions e^{izb_j} that appear in Eq. (19). In particular, as $-1 \leq b_j \leq 1$, we can use the expansion [29] $e^{izb_j} = J_0(z) + 2 \sum_{k=1}^{\infty} i^k J_k(z) T_k(b_j)$, where $J_k(z)$ is the Bessel function of integer order k to write Eq. (19) as

$$\Psi(t) = \left[J_0(z)I + 2 \sum_{k=1}^{\infty} J_k(z) \hat{T}_k(B) \right] \Psi(0). \quad (20)$$

Here $\hat{T}_k(B) = i^k T_k(B)$ is a matrix-valued modified Chebyshev polynomial that is defined by the recursion relations

$$\hat{T}_0(B) \Psi(0) = \Psi(0), \quad \hat{T}_1(B) \Psi(0) = iB \Psi(0), \quad (21)$$

and

$$\hat{T}_{k+1}(B)\Psi(0) = 2iB\hat{T}_k(B)\Psi(0) + \hat{T}_{k-1}(B)\Psi(0), \quad (22)$$

for $k \geq 1$.

As $\|\hat{T}_k(B)\| \leq 1$ by construction and $|J_k(z)| \leq |z|^k/2^k k!$ for z real [29], the resulting error vanishes exponentially fast for sufficiently large K . Thus, we can obtain an accurate approximation by summing contributions in Eq. (20) with $k \leq K$ only. The number K is fixed by requiring that $|J_k(z)| < \kappa$ for all $k > K$. Here, κ is a control parameter that determines the accuracy of the approximation. For fixed κ , K increases linearly with $z = t\|H\|_1$ (there is no requirement on t being small). From numerical analysis it is known that for fixed K , the Chebyshev polynomial is very nearly the same polynomial as the minimax polynomial [42], i.e. the polynomial of degree K that has the smallest maximum deviation from the true function, and is much more accurate than for instance a Taylor expansion of the same degree K . In Fig.1 we show a plot of $J_n(z = 200)$ as a function of n to illustrate these points. From Fig.1 it is clear that the Chebyshev polynomial expansion will only be useful if K lies to the right of the right-most extremum of $J_n(z = 200)$, i.e. K has to be larger than 200 in this example.

We now turn to the treatment of the current source $\mathbf{J}(t)$. The contribution of the source term to the EM field at time t is given by the last term in Eq. (5). For simplicity we only consider the case of a sinusoidal source

$$\mathbf{J}(\mathbf{r}, t) = \Theta(t)\Theta(T-t)\mathbf{s}(\mathbf{r})\sin(\Omega t), \quad (23)$$

where $\mathbf{s}(\mathbf{r})$ specifies the spatial distribution and $\Omega \equiv 2\pi f_s$ the angular frequency of the source. The step functions $\Theta(t)$ and $\Theta(T-t)$ indicate that the source is turned on at $t = 0$ and is switched off at $t = T$. Note that Eq. (23) may be used to compose sources with a more complicated time dependence by a Fourier sine transformation.

The formal expression for the contribution of the sinusoidal source (23) reads

$$\begin{aligned} \int_0^t e^{(t-u)H} \Phi(u) du &= (\Omega^2 + H^2)^{-1} e^{(t-T')H} \times (\Omega e^{T'H} - \Omega \cos \Omega T' - H \sin \Omega T') \Xi \\ &\equiv f(H, t, T', \Omega) \Xi, \end{aligned} \quad (24)$$

where $T' = \min(t, T)$ and $\Phi(u) \equiv \Theta(t)\Theta(T-t)\sin(\Omega t)\Xi$. The vector Ξ represents the spatial (time-independent) distribution $\mathbf{s}(\mathbf{r})$ and has the same dimension as $\Psi(0)$. The coefficients of the Chebyshev polynomial expansion of the formal solution (24) are calculated as follows. First we repeat the scaling procedure described above and substitute in Eq. (24) $H = ix\|H\|_1$, $t = z/\|H\|_1$, $T' = Z'/\|H\|_1$, and $\Omega = \omega\|H\|_1$. Then, we compute the (Fast) Fourier Transform with respect to x of the function $f(x, z, Z', \omega)$ (which is non-singular on the interval $-1 \leq x \leq 1$). By construction, the Fourier coefficients $S_k(t\|H\|_1)$ are the coefficients of the Chebyshev polynomial expansion [29].

Taking into account all contributions of the source term with k smaller than K' (determined by a procedure similar to the one for K), the one-step algorithm to compute the EM fields at time t reads

$$\hat{\Psi}(t) = \left[J_0(t\|H\|_1)I + 2 \sum_{k=1}^K J_k(t\|H\|_1)\hat{T}_k(B) \right] \Psi(0) + \left[S_0(t\|H\|_1)I + 2 \sum_{k=1}^{K'} S_k(t\|H\|_1)\hat{T}_k(B) \right] \Xi. \quad (25)$$

Note that in this one-step approach the time dependence of the source is taken into account exactly, without actually sampling it.

In a strict sense, the one-step method does not yield an orthogonal approximation. However, for practical purposes it can be viewed as an extremely stable time-integration algorithm because it yields an approximation to the exact time evolution operator $U(t) = e^{tH}$ that is exact to nearly machine precision, i.e. in practice the value of $\tilde{\epsilon}$ in Eq.(7) is very small. This also implies that within the same precision $\nabla \cdot (\mu \mathbf{H}(t)) = \nabla \cdot (\mu \mathbf{H}(t=0))$ and $\nabla \cdot (\varepsilon \mathbf{E}(t)) = \nabla \cdot (\varepsilon \mathbf{E}(t=0))$ holds for all times, implying that the numerical scheme will not produce artificial charges during the time integration [2, 3].

IV. IMPLEMENTATION

The basic steps in the construction of the product-formula and one-step algorithms are best illustrated by considering the simplest case, i.e. the Maxwell equations of a 1D homogeneous problem. From a conceptual point of view nothing is lost by doing this: the extension to 2D and 3D nonhomogeneous problems is straightforward, albeit technically non-trivial [11, 12, 26, 27].

We consider a system, infinitely large in the y and z direction, for which $\varepsilon = 1$ and $\mu = 1$. Under these conditions, the Maxwell equations reduce to two independent sets of first-order differential equations [1], the transverse electric




FIG. 2: Positions of the two TM-mode field components on the one-dimensional grid. The distance between two next-nearest neighbors is denoted by δ .

(TE) mode and the transverse magnetic (TM) mode [1]. As the equations of the TE- and TM-mode differ by a sign we can restrict our considerations to the TM-mode only. The magnetic field $H_y(x, t)$ and the electric field $E_z(x, t)$ of the TM-mode in the 1D cavity of length L are solutions of

$$\frac{\partial}{\partial t} H_y(x, t) = \frac{\partial}{\partial x} E_z(x, t), \quad (26)$$

$$\frac{\partial}{\partial t} E_z(x, t) = \frac{\partial}{\partial x} H_y(x, t) - J_z(x, t), \quad (27)$$

subject to the boundary condition $E_z(0, t) = E_z(L, t) = 0$ [1]. Note that the divergence of both fields are trivially zero.

Following Yee [4], to discretize Eqs.(26) and (27), it is convenient to assign H_y to odd and E_z to even numbered lattice sites, as shown in Fig. 2. Using the second-order central-difference approximation to the first derivative with respect to x , we obtain

$$\frac{\partial}{\partial t} H_y(2i+1, t) = \delta^{-1} (E_z(2i+2, t) - E_z(2i, t)), \quad (28)$$

$$\frac{\partial}{\partial t} E_z(2i, t) = \delta^{-1} (H_y(2i+1, t) - H_y(2i-1, t)) - J_z(2i, t), \quad (29)$$

where we have introduced the notation $A(i, t) = A(x = i\delta/2, t)$. The integer i labels the grid points and δ denotes the distance between two next-nearest neighbors on the lattice (hence the absence of a factor two in the nominator). We define the n -dimensional vector $\Psi(t)$ by

$$\Psi(i, t) = \begin{cases} H_y(i, t), & i \text{ odd} \\ E_z(i, t), & i \text{ even} \end{cases}. \quad (30)$$

The vector $\Psi(t)$ contains both the magnetic and the electric field on the lattice points $i = 1, \dots, n$. The i -th element of $\Psi(t)$ is given by the inner product $\Psi(i, t) = \mathbf{e}_i^T \cdot \Psi(t)$ where $\mathbf{e}_i$ denotes the i -th unit vector in the n -dimensional vector space. Using this notation (which proves most useful for the case of 2D and 3D for which it is rather cumbersome to write down explicit matrix representations), it is easy to show that Eqs.(28) and (29) can be written in the form (4) where the matrix H is given by

$$H = \delta^{-1} \sum_{i=1}^{n-1} (\mathbf{e}_i \mathbf{e}_{i+1}^T - \mathbf{e}_{i+1} \mathbf{e}_i^T) = \begin{pmatrix} 0 & \delta^{-1} & & & \\ -\delta^{-1} & 0 & \delta^{-1} & & \\ & \ddots & \ddots & \ddots & \\ & & -\delta^{-1} & 0 & \delta^{-1} \\ & & & -\delta^{-1} & 0 \end{pmatrix}. \quad (31)$$

We immediately see that H is sparse and skew-symmetric by construction.

A. Yee-type algorithms

First we demonstrate that the Yee algorithm fits into the product-formula approach. For the 1D model (31) it is easy to see that one time-step with the Yee algorithm corresponds to the operation

$$U_1^{Yee}(\tau) = (I + \tau A)(I - \tau A^T) = e^{\tau A} e^{-\tau A^T}, \quad (32)$$

where

$$A = \delta^{-1} \sum_{i=2}^{n-1} (\mathbf{e}_i \mathbf{e}_{i-1}^T - \mathbf{e}_i \mathbf{e}_{i+1}^T) = \begin{pmatrix} 0 & \delta^{-1} & 0 & 0 & 0 & \cdots \\ 0 & 0 & 0 & 0 & 0 & \cdots \\ 0 & -\delta^{-1} & 0 & \delta^{-1} & 0 & \cdots \\ 0 & 0 & 0 & 0 & 0 & \cdots \\ 0 & 0 & 0 & -\delta^{-1} & 0 & \cdots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \ddots \end{pmatrix}, \quad (33)$$

and we used the arrangements of H and E fields as defined by Eq.(30). We use the notation $\sum'$ to indicate that the stride of the summation index is two. Note that since $A^2 = 0$ we have $e^{\tau A} = 1 + \tau A$ exactly. Therefore we recover the time-step operator of the Yee algorithm using the first-order product formula approximation to $e^{\tau H}$ and decomposing $H = A - A^T$. However, the Yee algorithm is second-order, not first order, accurate in time [2, 3]. This is due to the use of a staggered grid in time [2, 3]. To perform one time step with the Yee algorithm we need to know the values of $E_z(t)$ and $H_y(t + \tau/2)$, not $H_y(t)$. Another method has to supply the H_y -field at a time shifted by $\tau/2$.

Within the spirit of this approach, we can easily eliminate the staggered-in-time grid at virtually no extra computational cost or programming effort (if a conventional Yee code is available) by using the second-order product formula

$$U_2^{Yee}(\tau) = e^{\tau A/2} e^{-\tau A^T} e^{\tau A/2} = (I + \tau A/2)(I - \tau A^T)(I + \tau A/2). \quad (34)$$

The effect of the last factor is to propagate the H_y -field by $\tau/2$. The middle factor propagates the E_z -field by τ . The first factor again propagates the H_y field by $\tau/2$. In this scheme all EM fields are to be taken at the same time. The algorithm defined by $U_2^{Yee}(\tau)$ is second-order accurate in time by construction [16]. Note that $e^{\tau A/2}$ is not orthogonal so nothing has been gained in terms of stability. Since $(U_2^{Yee}(\tau))^m = e^{-\tau A/2} (U_1^{Yee}(\tau))^m e^{\tau A/2}$, we see that, compared to the original Yee algorithm, the extra computational work is proportional to $(1 + 2/m)$, hence negligible if the number of time steps m is large.

According to the general theory outlined in Sec.III, the expression

$$U_4^{Yee}(\tau) = U_2^{Yee}(a\tau) U_2^{Yee}(a\tau) U_2^{Yee}((1-4a)\tau) U_2^{Yee}(a\tau) U_2^{Yee}(a\tau), \quad (35)$$

defines a fourth-order accurate Yee-like scheme, the realization of which requires almost no effort once U_2^{Yee} has been implemented. It is easy to see that the above construction of the Yee-like algorithms holds for the much more complicated 2D, and 3D inhomogeneous case as well. Also note that the fourth-order Yee algorithm U_4^{Yee} does not require extra storage to hold field values at intermediate times.

B. Unconditionally stable algorithms

Guided by previous work on Schrödinger and diffusion problems [16, 35, 40], we split H into two parts

$$H_1 = \delta^{-1} \sum_{i=1}^{n-1} (\mathbf{e}_i \mathbf{e}_{i+1}^T - \mathbf{e}_{i+1} \mathbf{e}_i^T) = \begin{pmatrix} 0 & \delta^{-1} & 0 & 0 & 0 & \cdots \\ -\delta^{-1} & 0 & 0 & 0 & 0 & \cdots \\ 0 & 0 & 0 & \delta^{-1} & 0 & \cdots \\ 0 & 0 & -\delta^{-1} & 0 & 0 & \cdots \\ 0 & 0 & 0 & 0 & 0 & \cdots \\ 0 & 0 & 0 & 0 & -\delta^{-1} & \cdots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \ddots \end{pmatrix}, \quad (36)$$

$$H_2 = \delta^{-1} \sum_{i=1}^{n-2} (\mathbf{e}_{i+1} \mathbf{e}_{i+2}^T - \mathbf{e}_{i+2} \mathbf{e}_{i+1}^T) = \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & \cdots \\ 0 & 0 & \delta^{-1} & 0 & 0 & \cdots \\ 0 & -\delta^{-1} & 0 & 0 & 0 & \cdots \\ 0 & 0 & 0 & 0 & \delta^{-1} & \cdots \\ 0 & 0 & 0 & -\delta^{-1} & 0 & \cdots \\ 0 & 0 & 0 & 0 & 0 & \cdots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \ddots \end{pmatrix}. \quad (37)$$

such that $H = H_1 + H_2$. In other words we divide the lattice into odd and even numbered cells. Clearly both H_1 and H_2 are skew-symmetric block-diagonal matrices, containing one 1×1 matrix and $(n-1)/2$ real, 2×2 skew-symmetric matrices. According to the general theory given above, the first-order algorithm is given by

$$\tilde{U}_1(\tau) = e^{\tau H_1} e^{\tau H_2} = \left\{ \prod_{i=1}^{n-1} \exp[\tau \delta^{-1} (\mathbf{e}_i \mathbf{e}_{i+1}^T - \mathbf{e}_{i+1} \mathbf{e}_i^T)] \right\} \left\{ \prod_{i=1}^{n-2} \exp[\tau \delta^{-1} (\mathbf{e}_{i+1} \mathbf{e}_{i+2}^T - \mathbf{e}_{i+2} \mathbf{e}_{i+1}^T)] \right\}. \quad (38)$$

To derive Eq.(38) we used the block-diagonal structure of H_1 and H_2 (see Eqs.(36) and (37)) and obtained an exact expression for $\tilde{U}_1(\tau)$ in terms of an ordered product of matrix exponentials: the order of the matrix exponentials between each pair of curly brackets is irrelevant as these matrices commute with each other. Each of these matrix exponentials only operates on a pair of elements of $\Psi(t)$ and leaves other elements intact. The indices of each of these pairs are given by the subscripts of $\mathbf{e}$ and $\mathbf{e}^T$. From Eq.(38) it is clear what a program should do: Make loops over i with stride 2. For each i pick a pair of elements from $\Psi(t)$ according to the subscripts of $\mathbf{e}$ and $\mathbf{e}^T$, compute (or fetch from memory) the elements of the plane rotation (see Eq. (39)), perform the plane rotation, i.e. multiply the 2×2 matrices and the vectors of length two, and overwrite the same two elements. As the matrix exponential of a block-diagonal matrix is equal to the block-diagonal matrix of the matrix exponentials of the individual blocks, the numerical calculation of $e^{\tau H_1}$ (or $e^{\tau H_2}$) reduces to the calculation of $(n-1)/2$ matrix exponentials of 2×2 matrices. The matrix exponential of a typical 2×2 matrix appearing in $e^{\tau H_1}$ or $e^{\tau H_2}$ is given by

$$\exp \left[\alpha \begin{pmatrix} 0 & 1 \\ -1 & 0 \end{pmatrix} \right] \begin{pmatrix} \Psi(i, t) \\ \Psi(j, t) \end{pmatrix} = \begin{pmatrix} \cos \alpha & \sin \alpha \\ -\sin \alpha & \cos \alpha \end{pmatrix} \begin{pmatrix} \Psi(i, t) \\ \Psi(j, t) \end{pmatrix}. \quad (39)$$

Using the algorithm to compute Eq.(38), it is easy to construct the unconditionally stable, higher-order algorithms $\tilde{U}_2(\tau)$ and $\tilde{U}_4(\tau)$, see Eq.(13) and Eq.(15).

Obviously, the decomposition into H_1 Eq.(36) and H_2 Eq.(37) yields the most simple real-space algorithm. It is not difficult to imagine that a better but slightly more complicated algorithm can be constructed by using blocks of 3×3 instead of 2×2 matrices. Thus we are lead to consider the decomposition

$$H_3 = \delta^{-1} \sum_{i=1}^{n-2} (\mathbf{e}_i \mathbf{e}_{i+1}^T + \mathbf{e}_{i+1} \mathbf{e}_{i+2}^T - \mathbf{e}_{i+1} \mathbf{e}_i^T - \mathbf{e}_{i+2} \mathbf{e}_{i+1}^T) = \begin{pmatrix} 0 & \delta^{-1} & 0 & 0 & 0 & \cdots \\ -\delta^{-1} & 0 & \delta^{-1} & 0 & 0 & \cdots \\ 0 & -\delta^{-1} & 0 & 0 & 0 & \cdots \\ 0 & 0 & 0 & 0 & 0 & \cdots \\ 0 & 0 & 0 & 0 & 0 & \cdots \\ 0 & 0 & 0 & 0 & -\delta^{-1} & \cdots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \ddots \end{pmatrix}, \quad (40)$$

$$H_4 = \delta^{-1} \sum_{i=1}^{n-4} (\mathbf{e}_{i+2} \mathbf{e}_{i+3}^T + \mathbf{e}_{i+3} \mathbf{e}_{i+4}^T - \mathbf{e}_{i+3} \mathbf{e}_{i+2}^T - \mathbf{e}_{i+4} \mathbf{e}_{i+3}^T) = \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & \cdots \\ 0 & 0 & 0 & 0 & 0 & \cdots \\ 0 & 0 & 0 & \delta^{-1} & 0 & \cdots \\ 0 & 0 & -\delta^{-1} & 0 & \delta^{-1} & \cdots \\ 0 & 0 & 0 & -\delta^{-1} & 0 & \cdots \\ 0 & 0 & 0 & 0 & 0 & \cdots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \ddots \end{pmatrix}. \quad (41)$$

where the double prime indicated that the stride of the index i is three. Obviously both H_3 and H_4 are skew-symmetric block-diagonal matrices, build from the 3×3 skew-symmetric matrix

$$B = \begin{pmatrix} 0 & \delta^{-1} & 0 \\ -\delta^{-1} & 0 & \delta^{-1} \\ 0 & -\delta^{-1} & 0 \end{pmatrix}. \quad (42)$$

As $B^3 = -2B$ we have

$$e^{\tau B} = 1 + sB + cB^2 = \begin{pmatrix} 1-c & s & c \\ -s & 1-2c & s \\ -c & -s & 1-c \end{pmatrix}, \quad (43)$$

where $s = \sin(\sqrt{2}\tau)$ and $c = \sin^2(\tau/\sqrt{2})$. In practice, using the 3×3 instead of the 2×2 decomposition is marginally more difficult. We will denote the corresponding second and fourth-order algorithm by $U_2^{3 \times 3}$ and $U_4^{3 \times 3}$ respectively.

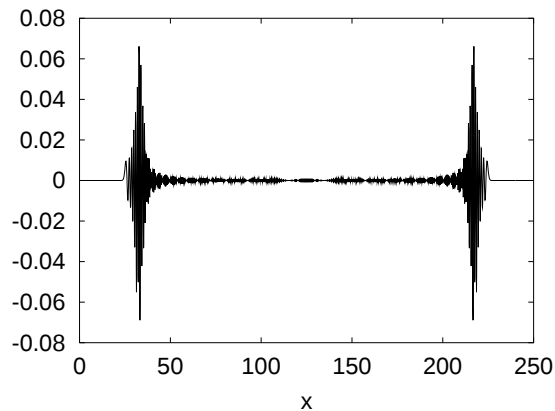


FIG. 3: The field $H_y(x, t = 100)$ generated by a current source at $x = 125$ that oscillates at frequency $f_s = 1$ during the interval $0 \leq t \leq 6$, as obtained by the one-step algorithm with $K' = 2103$ ($K = 0$ in this case).

C. ADI algorithm

For the tri-diagonal matrix (31), the ADI algorithm reduces to the Crank-Nicholson method [42]. The tri-diagonal structure of the matrix H permits the calculation of $(I - \tau H/2)^{-1}\Psi$ in $\mathcal{O}(n)$ operations by standard linear algebra methods [42].

D. One-step algorithm

The one-step algorithm is based on the recursion (see Eqs.(21) and (22))

$$\Psi_{k+1} = \frac{2H}{\|H\|_1} \Psi_k + \Psi_{k-1}. \quad (44)$$

Thus, the explicit form Eq.(31) is all we need to implement the matrix-vector operation (i.e. $\Psi' \leftarrow H\Psi$) that enters Eq.(44).

The coefficients $J_k(z)$ and $S_k(t)$ (see Eq.(25)) should be calculated to high precision. Using the recursion relation of the Bessel functions, all K coefficients can be obtained with $\mathcal{O}(K)$ arithmetic operations [42]. The numbers $S_k(t)$ can be calculated in $\mathcal{O}(K \log K)$ by standard Fast Fourier transformation techniques. Clearly both computations are a negligible fraction of the total computational cost for solving the Maxwell equations.

Performing one time step amounts to repeatedly using recursion (22) to obtain $\hat{T}_k(B)\Psi(0)$ for $k = 2, \dots, K$, multiply the elements of this vector by $J_k(z)$ (or $S_k(z)$) and add all contributions. This procedure requires storage for two vectors of the same length as $\Psi(0)$ and some code to multiply such a vector by the sparse matrix H . The result of performing one time step yields the solution at time t , hence the name one-step algorithm. In contrast to what Eqs. (21) and (22) might suggest, the algorithm does not require the use of complex arithmetic.

In the sequel, the caret $\hat{}$ on top of a symbol indicates that the results have been obtained by means of the one-step algorithm.

V. NUMERICAL EXPERIMENTS

Except for the conventional Yee algorithm, all algorithms discussed in this paper operate on the vector of fields defined at the same time t . We use the one-step algorithm (with a time step $\tau/2$) to compute $E_z(\tau/2)$ and $H_y(\tau/2)$. Then we use $E_z(0)$ and $H_y(\tau/2)$ as the initial values for the Yee algorithm. In the presence of a current source, there are some ambiguities with this procedure as it is not obvious how to treat the source term in Eq.(9). In order to permit a comparison of the final result of the conventional Yee algorithm with those of the other methods, we use the one-step algorithm once more to shift the time of the H_y field by $-\tau/2$. This procedure to prepare the initial and to analyse the final state of the Yee algorithm does in fact make the results of the Yee algorithm look a little

TABLE I: The error $\|\tilde{\Psi}(t) - \hat{\Psi}(t)\|/\|\hat{\Psi}(t)\|$ at time $t = 100$ as a function of the time step τ for eight different FDTD algorithms. The current source is positioned at the center of the system (see Fig.3), and oscillates at frequency $f_s = 1$ during the interval $0 \leq t \leq 6$, $\hat{\Psi}(t)$ is the vector obtained by the one-step algorithm with $\kappa = 10^{-9}$, using $K' = 2103$ matrix-vector operations $\Psi' \leftarrow M\Psi$. Yee: $\tilde{\Psi}(t)$ obtained by the Yee algorithm [2, 3, 4]; Other columns: $\tilde{\Psi}(t)$ obtained by the algorithms indicated.

τ	Yee	U_2^{Yee}	U_2^{ADI}	$\tilde{U}_2$	$\tilde{U}_2^{3 \times 3}$	U_4^{Yee}	$\tilde{U}_4$	$\tilde{U}_4^{3 \times 3}$
$0.10000E + 0$	$0.16E + 1$	$0.15E + 1$	$0.15E + 1$	$0.15E + 1$	$0.14E + 1$	$0.15E + 0$	$0.37E + 0$	$0.27E + 0$
$0.50000E - 1$	$0.18E + 1$	$0.18E + 1$	$0.13E + 1$	$0.16E + 1$	$0.13E + 1$	$0.36E - 1$	$0.33E - 1$	$0.23E - 1$
$0.25000E - 1$	$0.68E + 0$	$0.65E + 0$	$0.12E + 1$	$0.72E + 0$	$0.12E + 1$	$0.25E - 2$	$0.22E - 2$	$0.15E - 2$
$0.12500E - 1$	$0.21E + 0$	$0.19E + 0$	$0.35E + 0$	$0.13E + 1$	$0.31E + 0$	$0.16E - 3$	$0.14E - 3$	$0.96E - 4$
$0.62500E - 2$	$0.63E - 1$	$0.55E - 1$	$0.10E + 0$	$0.35E + 0$	$0.78E - 1$	$0.99E - 5$	$0.87E - 5$	$0.60E - 5$
$0.31250E - 2$	$0.19E - 1$	$0.14E - 1$	$0.28E - 1$	$0.88E - 1$	$0.20E - 1$	$0.62E - 6$	$0.55E - 6$	$0.38E - 6$
$0.15625E - 2$	$0.61E - 2$	$0.35E - 2$	$0.69E - 1$	$0.22E - 1$	$0.49E - 2$	$0.39E - 7$	$0.34E - 7$	$0.24E - 7$
$0.78125E - 3$	$0.23E - 2$	$0.86E - 2$	$0.17E - 2$	$0.55E - 2$	$0.12E - 2$	$0.24E - 8$	$0.21E - 8$	$0.15E - 8$
$0.39063E - 3$	$0.10E - 2$	$0.22E - 3$	$0.43E - 3$	$0.14E - 2$	$0.31E - 3$	$0.24E - 9$	$0.24E - 9$	$0.22E - 9$

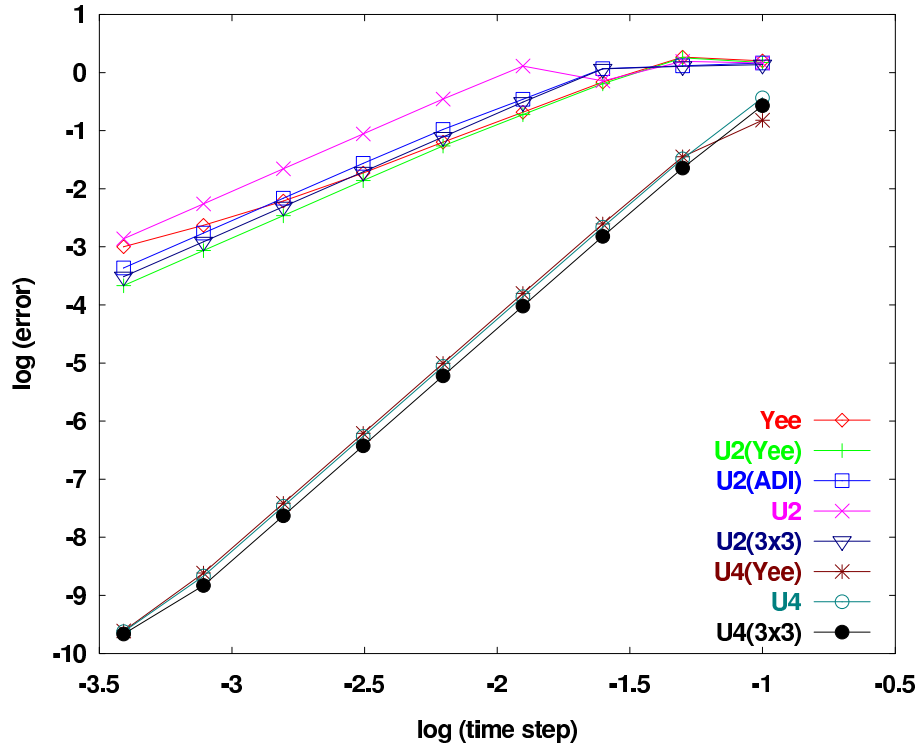


FIG. 4: The data presented in Table I plotted on a double logarithmic scale. Lines are guide to the eye.

more accurate than they would be if the exact data of the $\tau/2$ -shifted fields are not available. Thus, the results on the errors of the conventional Yee algorithm presented in this paper give a too optimistic view on the accuracy of this algorithm but we nevertheless adopt the above procedure to make a quantitative comparison between the various algorithms.

We define the error of the solution $\tilde{\Psi}(t)$ for the wave form by $\|\tilde{\Psi}(t) - \hat{\Psi}(t)\|/\|\hat{\Psi}(t)\|$ where $\hat{\Psi}(t)$ is the vector of EM fields obtained by the one-step algorithm. Thereby we have already assumed that the one-step algorithm yields the exact (within numerical precision) results but this has to be demonstrated of course. A comparison of the results of an unconditionally stable algorithm, e.g. $\tilde{U}_4$ with those of the one-step algorithm is sufficient to show that within rounding errors the latter yields the exact answer. Using the triangle inequality

$$\|\Psi(t) - \hat{\Psi}(t)\| \leq \|\Psi(t) - \tilde{\Psi}(t)\| + \|\tilde{\Psi}(t) - \hat{\Psi}(t)\|, \quad (45)$$

TABLE II: The error $\|\tilde{\Psi}(t) - \hat{\Psi}(t)\|/\|\hat{\Psi}(t)\|$ at time $t = 100$ as a function of the time step τ for eight different FDTD algorithms. The system is the same as in Fig.3 and Table I. The initial values of the EM fields are random, distributed uniformly over the interval $[-1,1]$. $\hat{\Psi}(t)$ is the vector obtained by the one-step algorithm $\kappa = 10^{-9}$, using $K = 2080$ matrix-vector operations $\Psi' \leftarrow M\Psi$. Yee: $\tilde{\Psi}(t)$ obtained by the Yee algorithm [2, 3, 4]; Other columns: $\tilde{\Psi}(t)$ obtained by the algorithms indicated.

τ	Yee	U_2^{Yee}	U_2^{ADI}	$\tilde{U}_2$	$\tilde{U}_2^{3 \times 3}$	U_4^{Yee}	$\tilde{U}_4$	$\tilde{U}_4^{3 \times 3}$
$0.10000E + 0$	$0.99E + 1$	$0.11E + 2$	$0.14E + 1$	$0.15E + 1$	$0.17E + 1$	$0.11E + 1$	$0.13E + 1$	$0.13E + 1$
$0.50000E - 1$	$0.13E + 1$	$0.13E + 1$	$0.13E + 1$	$0.13E + 1$	$0.14E + 1$	$0.78E + 0$	$0.16E + 0$	$0.16E + 0$
$0.25000E - 1$	$0.13E + 1$	$0.13E + 1$	$0.13E + 1$	$0.13E + 1$	$0.12E + 1$	$0.57E - 2$	$0.11E - 1$	$0.11E - 1$
$0.12500E - 1$	$0.12E + 1$	$0.12E + 1$	$0.14E + 1$	$0.12E + 1$	$0.63E + 0$	$0.36E - 2$	$0.71E - 3$	$0.71E - 3$
$0.62500E - 2$	$0.70E + 0$	$0.70E + 0$	$0.12E + 1$	$0.32E + 0$	$0.16E + 0$	$0.22E - 3$	$0.45E - 4$	$0.45E - 4$
$0.31250E - 2$	$0.18E + 0$	$0.18E + 0$	$0.36E + 0$	$0.82E - 1$	$0.41E - 1$	$0.14E - 4$	$0.28E - 5$	$0.28E - 5$
$0.15625E - 2$	$0.46E - 1$	$0.46E - 1$	$0.92E - 1$	$0.20E - 1$	$0.10E - 1$	$0.89E - 6$	$0.17E - 6$	$0.17E - 6$
$0.78125E - 3$	$0.11E - 1$	$0.11E - 1$	$0.23E - 1$	$0.51E - 2$	$0.26E - 2$	$0.56E - 7$	$0.11E - 7$	$0.28E - 8$
$0.39063E - 3$	$0.29E - 2$	$0.29E - 2$	$0.57E - 2$	$0.13E - 2$	$0.64E - 3$	$0.35E - 8$	$0.68E - 9$	$0.18E - 9$

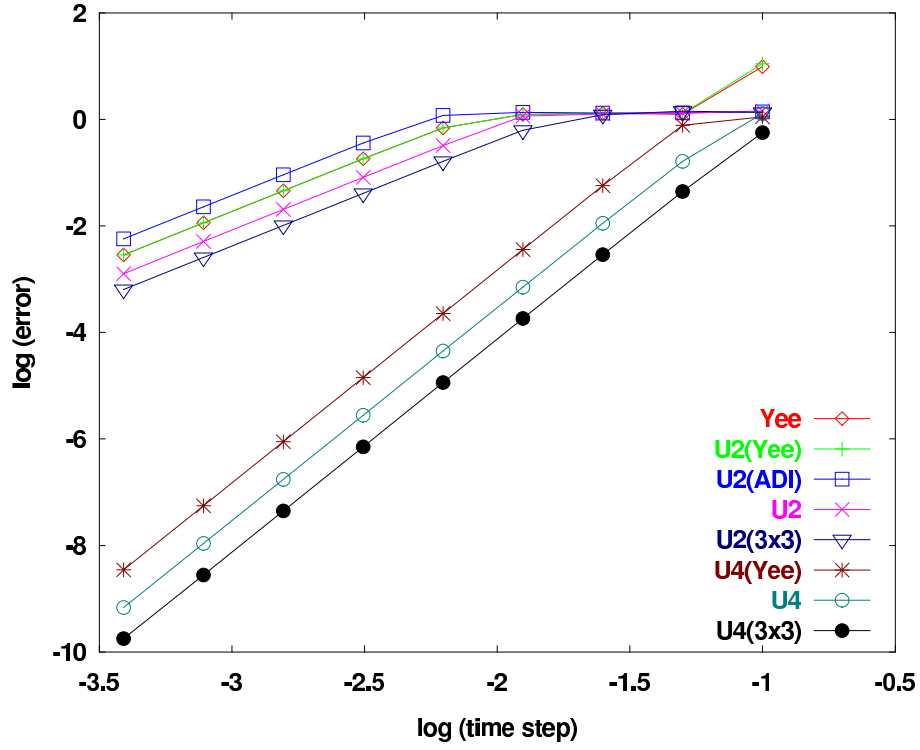


FIG. 5: The data presented in Table II plotted on a double logarithmic scale. Lines are guide to the eye.

and the rigorous bound

$$\|\Psi(t) - \tilde{\Psi}(t)\| \leq c_4 \tau^4 t \left(\|\Psi(0)\| + \int_0^t \|\mathbf{J}(u)\| du \right), \quad (46)$$

we can be confident that the one-step algorithm yields the numerically exact answer if i) Eq.(46) is not violated and ii) if $\|\tilde{\Psi}(t) - \hat{\Psi}(t)\|$ vanishes like τ^4 .

In Fig.3 we show a typical result of a one-step calculation on a grid of $n = 5001$ sites with $\delta = 0.1$ (corresponding to a physical length of 250.05), and a current source placed at $i = 2500$ to eliminate possible artifacts of the boundaries. The frequency of the source is set to one ($f_s = 1$) and the number of periods the source radiates is set to six (i.e. $T = 6$). In Table I (Fig.4) we present results for the errors, as obtained by repeating the simulation shown in Fig.3 using eight different FDTD methods. In Tables II and III (Figs.5 and 6 respectively) we shown similar results but

TABLE III: The error $\|\tilde{\Psi}(t) - \hat{\Psi}(t)\|/\|\hat{\Psi}(t)\|$ at time $t = 100$ as a function of the time step τ for eight different FDTD algorithms. The system is the same as in Fig.3 and Table I. The initial state of the EM fields is a Gaussian wave packet ($E_z(t) = \exp(-(x-x_0-t)^2/\sigma^2)$) with a width $\sigma = 4$, and its center $x_0 = 125$ positioned at the middle of the system (see Fig.3). $\hat{\Psi}(t)$ is the vector obtained by the one-step algorithm with $\kappa = 10^{-9}$, using $K = 2080$ matrix-vector operations $\Psi' \leftarrow M\Psi$. Yee: $\tilde{\Psi}(t)$ obtained by the Yee algorithm [2, 3, 4]; Other columns: $\tilde{\Psi}(t)$ obtained by the algorithms indicated.

τ	Yee	U_2^{Yee}	U_2^{ADI}	$\tilde{U}_2$	$\tilde{U}_2^{3 \times 3}$	U_4^{Yee}	$\tilde{U}_4$	$\tilde{U}_4^{3 \times 3}$
$0.10000E+0$	$0.25E-2$	$0.25E-2$	$0.50E-2$	$0.14E+1$	$0.79E+0$	$0.28E-6$	$0.15E-1$	$0.17E-1$
$0.50000E-1$	$0.63E-3$	$0.63E-3$	$0.13E-2$	$0.90E+0$	$0.25E+0$	$0.17E-7$	$0.95E-3$	$0.15E-3$
$0.25000E-1$	$0.16E-3$	$0.16E-3$	$0.32E-3$	$0.26E+0$	$0.65E-1$	$0.11E-8$	$0.60E-4$	$0.97E-4$
$0.12500E-1$	$0.40E-4$	$0.39E-4$	$0.79E-4$	$0.65E-1$	$0.16E-1$	$0.69E-10$	$0.37E-5$	$0.61E-5$
$0.62500E-2$	$0.99E-5$	$0.98E-5$	$0.20E-4$	$0.16E-1$	$0.41E-2$	$0.12E-10$	$0.23E-6$	$0.38E-6$
$0.31250E-2$	$0.25E-5$	$0.25E-5$	$0.49E-5$	$0.41E-2$	$0.10E-2$	$0.12E-10$	$0.15E-7$	$0.24E-7$
$0.15625E-2$	$0.63E-6$	$0.61E-6$	$0.12E-5$	$0.10E-2$	$0.26E-3$	$0.12E-10$	$0.91E-9$	$0.15E-8$
$0.78125E-3$	$0.16E-6$	$0.15E-6$	$0.31E-6$	$0.25E-3$	$0.64E-4$	$0.12E-10$	$0.55E-10$	$0.10E-9$
$0.39063E-3$	$0.41E-7$	$0.38E-7$	$0.77E-7$	$0.64E-4$	$0.16E-4$	$0.12E-10$	$0.43E-10$	$0.46E-10$

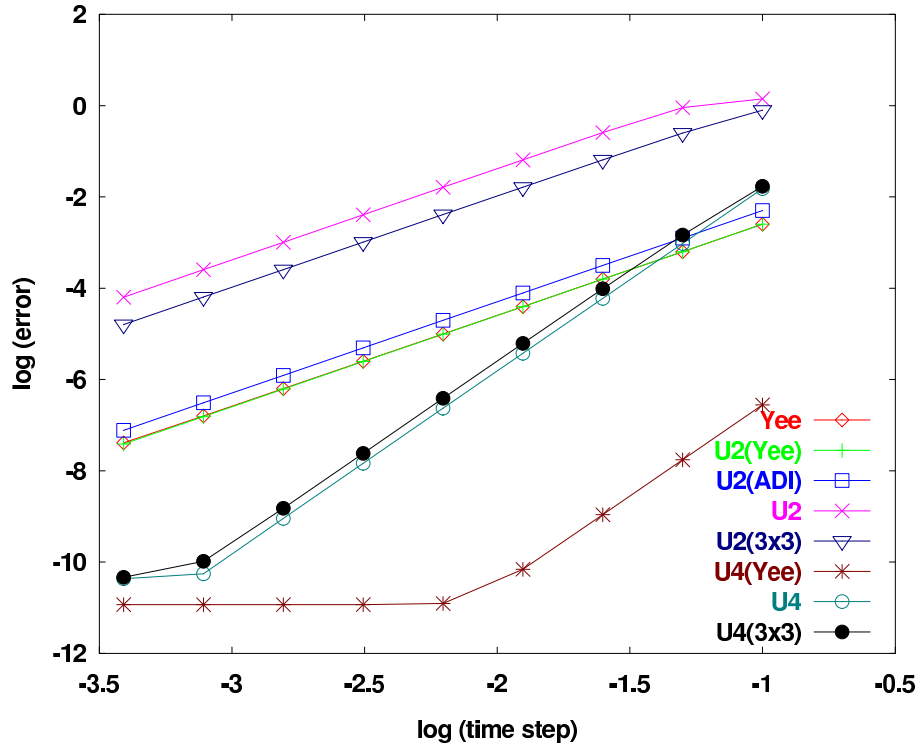


FIG. 6: The data presented in Table III plotted on a double logarithmic scale. Lines are guide to the eye.

instead of using a current source, a random wave form (Table II) and Gaussian wave packet (Table III) was taken as the initial condition.

From the data in Tables I, II and III we conclude that the error of algorithm $\tilde{U}_4$ vanishes like τ^4 , demonstrating that the one-step algorithm yields the numerically exact result (see Eqs.45 and 46). The results presented in Tables II and III have been obtained by using a vector of initial values that is normalized to one, i.e. $\|\Psi(0)\| = 1$. As $\|\hat{\Psi}(t)\| = 1$ for $0 \leq t \leq 100$ to at least 10 digits, $\|\tilde{\Psi}(t) - \hat{\Psi}(t)\|/\|\hat{\Psi}(t)\| = \|\tilde{\Psi}(t) - \hat{\Psi}(t)\|$ for all entries in Tables II and III. The high precision of the one-step algorithm also allows us to use it for genuine time stepping with arbitrarily large time steps, this in spite of the fact that strictly speaking, the one-step algorithm is not unconditionally stable.

The data in Tables I, II and III suggests that there does not seem to be a significant difference between the conventional Yee algorithm and its variant U_2^{Yee} but in fact there is. The time evolution matrix corresponding to the Yee and the U_2^{Yee} algorithm is not orthogonal. Therefore the energy of the electromagnetic field ($\|\Psi(t)\|^2$) is not

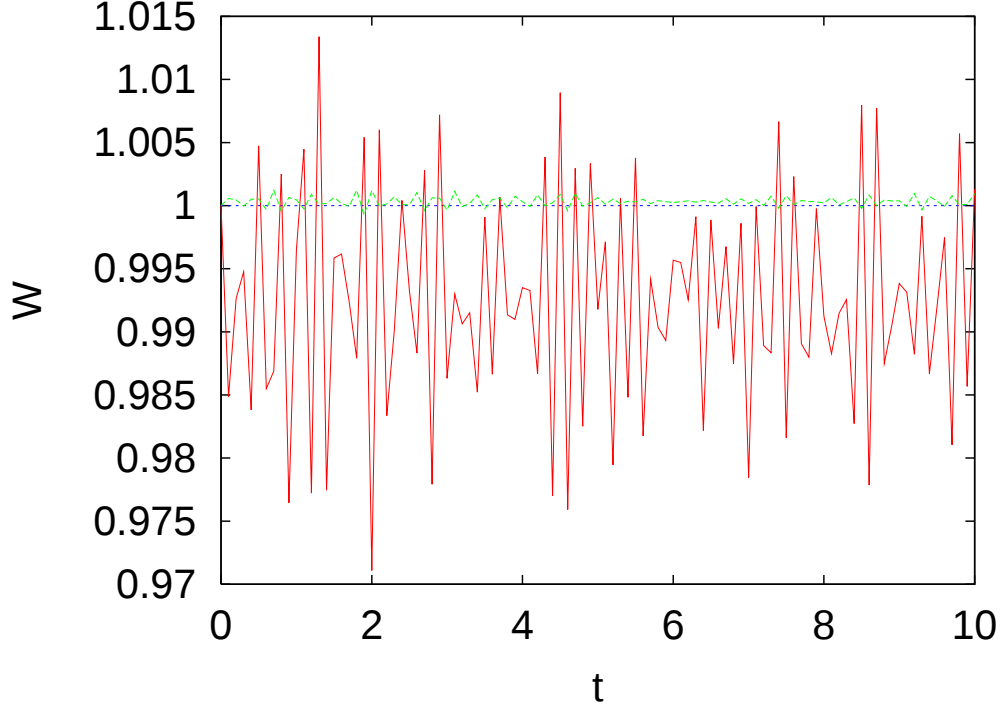


FIG. 7: The energy of the EM fields $W = \Psi^T(t) \cdot \Psi(t)$ as the function of time as obtained by the Yee (solid line), U_2^{Yee} (dashed line), and $\tilde{U}_4$ (dotted line) algorithm for a 1D cavity of size 48.05 ($n = 97$ mesh points), a mesh size $\delta = 0.1$ and a time step $\tau = 0.01$.

conserved. Furthermore, in the conventional Yee algorithm, the E and H -fields are time-shifted by $\tau/2$ with respect to each other. These artifacts are less prominent if we use U_2^{Yee} instead of the Yee algorithm. In Fig.7 we show results of the time evolution of the total energy of the EM field, for a system of $n=97$ sites, a mesh size $\delta = 0.1$ and a time step of $\tau = 0.01$. A normalized ($\|\Psi(0)\|^2 = 1$) random initial condition was used. Furthermore, for this type of application, it makes no sense to invoke the procedure described at the beginning of this section to time-shift one of the EM-fields by $\tau/2$: as this operation has to be performed at each time step and is computationally expensive (because it is numerically exact), we could as well use the same numerically exact procedure for time stepping itself.

For the Yee algorithm, the fluctuations of the energy are a factor of ten larger than in the case of the U_2^{Yee} algorithm. As expected on theoretical grounds, the $\tilde{U}_4$ algorithm (dotted, horizontal line) exactly conserves the energy. The fact that U_2^{Yee} conserves EM-field energy much better than the Yee algorithm also has a considerable impact on the quality of the eigenmode distribution. The latter is obtained by Fourier transformation of $\Psi^T(t) \cdot \Psi(0)$ (see ref.[11] for more details). In Fig.8 we show the low-frequency part of the eigenmode distribution of the same system as the one of Fig.7. It is obvious that there is a significant improvement in the quality of the spectrum if we use U_2^{Yee} instead of the Yee algorithm but for this application $\tilde{U}_4$ performs much better than the Yee-type algorithms.

Table I suggests that $\tilde{U}_2$ is the least efficient of the five FDTD methods: It uses more arithmetic operations than the Yee algorithm and yields errors that are larger than those of the Yee algorithm. However, this conclusion is biased by the choice of the model problem and does not generalize. If the initial EM field distribution is random then, for sufficiently small τ , algorithm $\tilde{U}_2$ is more accurate than the two second-order accurate Yee algorithms, as is clear from the data in Table II [43]. Also in this case, for the largest τ in Table II, the Yee and U_2^{Yee} algorithm are operating at the point of instability, signaled by the fact that the norm of $\Psi(t)$ grows rapidly, resulting in errors that are very large. From Tables I and II one might conclude that the decomposition that generates Yee-type algorithms yields the least accurate approximations to the time evolution operator, although the difference is not really significant, but, as Table III shows, this conclusion would be wrong. If the initial state is a Gaussian wave packet that is fairly broad, the Yee-type algorithms are much more accurate than the unconditionally stable algorithms employed in this paper. From the data in Tables I, II and III we conclude that there is no good reason to use the ADI algorithm (even disregarding the fact that it is slower than the other second-order methods). In general the $\tilde{U}_2^{3 \times 3}$ ($\tilde{U}_4^{3 \times 3}$) algorithm

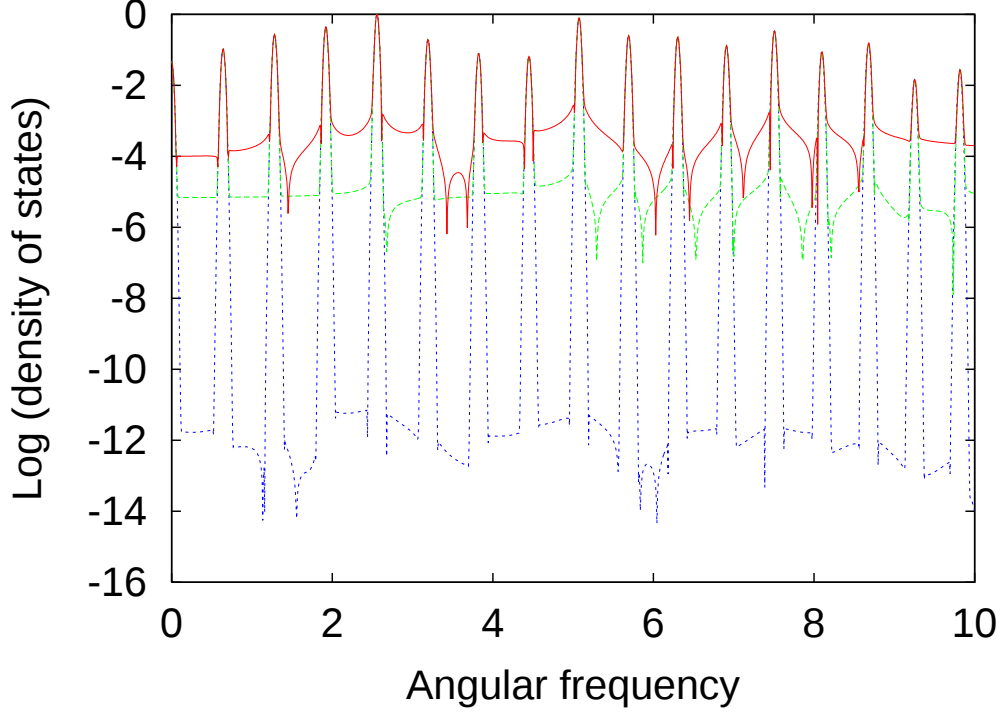


FIG. 8: The eigenvalues distribution of the matrix H , as obtained by Fourier transformation of $\Psi^T(t) \cdot \Psi(0)$, for the same system as in Fig.7. The function $\Psi^T(t) \cdot \Psi(0)$ is sampled at time intervals of 0.1, the total number of samples being 4096. Solid line: Yee algorithm; dashed line: U_2^{Yee} algorithm; dotted line: energy conserving algorithm $\tilde{U}_4$.

performs a little better than $\tilde{U}_2$ ($\tilde{U}_4$) but the gain is marginal. In contrast to the numerical data presented in Ref.[19], for all algorithms the data of Tables I,II and III clearly agree with the theoretically expected behavior of the error as a function of τ if τ is small enough [44].

Usually if a current source is present we have $\Psi(0) = \mathbf{0}$. Then the one-step algorithm requires K' (sparse) matrix-vector operations ($\Psi' \leftarrow M\Psi$) to compute $\Psi(t)$. For a 1D system the standard Yee, U_2^{Yee} and U_4^{Yee} , $\tilde{U}_2$, and $\tilde{U}_4$ algorithms perform (in worst case, without additional optimization), respectively, 1, 3/2, 6, 3/2, and 6 $M\Psi$ -operations per time step. The one-step algorithm carries out $K' = 2103$ matrix-vector operations $\Psi' \leftarrow M\Psi$ to complete this simulation. This implies that for all $\tau < t/K'$, the FDTD algorithms will perform more $\Psi' \leftarrow M\Psi$ operations than the one-step algorithm. For the data presented in this paper, this is the case if $\tau < 0.05$ for the Yee algorithm and is always the case for $\tilde{U}_4$ because the latter uses a factor of 6 more $\Psi' \leftarrow M\Psi$ operations than the Yee algorithm.

VI. CONCLUSION

The answer to the question which of the algorithms is the most efficient crucially one depends on the accuracy that one finds acceptable. Taking the data of Table I as an example we see that if one is satisfied with an error of more than 2%, one could use the Yee algorithm. With $\tau = 0.05$ it needs 2000 time steps to find the solution at $t = 100$, close to the $K' = 2103$. Nevertheless we recommend to use the one-step algorithm because then the time-integration error is negligible. The Yee algorithm is no competition for $\tilde{U}_4$ if one requires an error of less than 1% but then $\tilde{U}_4$ is not nearly as efficient (by a factor of about 6) as the one-step algorithm. Increasing the dimensionality of the problem favors the one-step algorithm [26, 27]. These conclusions seem to be quite general and are in concert with numerical experiments on 1D, 2D and 3D systems [27]. A simple theoretical analysis of the τ dependence of the error shows that the one-step algorithm is more efficient than any other FDTD method if we are interested in the EM fields at a particular (large) time only [26, 27]. This may open possibilities to solve problems in computational electrodynamics that are currently intractable. The Yee-like algorithms do not conserve the energy of the EM fields and therefore they are less suited for the calculation of the eigenvalue distributions (density of states), a problem for which the $\tilde{U}_4$ algorithm may be the most efficient of all the algorithms covered in the paper.

The main limitation of the one-step algorithm lies in its mathematical justification. The Chebyshev approach requires that H is diagonalizable and that its eigenvalues are real or pure imaginary. The effect of relaxing these conditions on the applicability of the Chebyshev approach is left for future research.

In this paper we have focused entirely on the accuracy of the time integration algorithms, using the most simple discretization of the spatial derivatives. In practice it is straightforward, though technically non-trivial, to treat more sophisticated discretization schemes [2, 12] by the methodology reviewed in this paper.

Acknowledgments

H.D.R. and K.M. are grateful to T. Iitaka for drawing our attention to the potential of the Chebyshev method and for illuminating discussions. This work is partially supported by the Dutch ‘Stichting Nationale Computer Faciliteiten’ (NCF), and the EC IST project CANVAD.

-
- [1] M. Born and E. Wolf, *Principles of Optics*, (Pergamon, Oxford, 1964).
 - [2] A. Taflové and S.C. Hagness, *Computational Electrodynamics - The Finite-Difference Time-Domain Method*, (Artech House, Boston, 2000).
 - [3] K.S. Kunz and R.J. Luebbers, *Finite-Difference Time-Domain Method for Electromagnetics*, (CRC Press, 1993).
 - [4] K.S. Yee, IEEE Transactions on Antennas and Propagation **14**, 302 (1966).
 - [5] See <http://www.fdt.org>
 - [6] F. Zheng, Z. Chen, and J. Zhang, IEEE Trans. Microwave Theory and Techniques **48**, 1550 (2000).
 - [7] T. Namiki, IEEE Trans. Microwave Theory and Techniques **48**, 1743 (2001).
 - [8] F. Zheng and Z. Chen, IEEE Trans. Microwave Theory and Techniques **49**, 1006 (2001).
 - [9] S.G. Garcia, T.W. Lee, S.C. Hagness, IEEE Trans. and Wireless Prop. Lett. **1**, 31 (2002).
 - [10] W. Harshawardhan, Q. Su, and R. Grobe, Phys. Rev. E **62**, 8705 (2000).
 - [11] J.S. Kole, M.T. Figge and H. De Raedt, Phys. Rev. E **64**, 066705 (2001).
 - [12] J.S. Kole, M.T. Figge and H. De Raedt, Phys. Rev. E **65**, 066705 (2002).
 - [13] O.P. Gandi, *Advances in Computational Electrodynamics - The Finite-Difference Time-Domain Method*, A. Taflové, Ed., (Artech House, Boston, 1998).
 - [14] B. Houshmand, T. Itoh, and M. Piket-May, *Advances in Computational Electrodynamics - The Finite-Difference Time-Domain Method*, A. Taflové, Ed., (Artech House, Boston, 1998).
 - [15] M. Suzuki, S. Miyashita, and A. Kuroda, Prog. Theor. Phys. **58**, 1377 (1977).
 - [16] H. De Raedt, Comp. Phys. Rep. **7**, 1 (1987).
 - [17] G.D. Smith, *Numerical solution of partial differential equations*, (Clarendon Press, Oxford, 1985).
 - [18] This is due to the specific split-up adopted in [10] and not an intrinsic property of the spectral-domain approach.
 - [19] R. Horváth, preprint 2002; <http://www.win.tue.nl/analysis/preprints/2002.html>
 - [20] H. Tal-Ezer, SIAM J. Numer. Anal. **23**, 11 (1986).
 - [21] H. Tal-Ezer and R. Kosloff, J. Chem. Phys. **81**, 3967 (1984).
 - [22] C. Leforestier, R.H. Bisseling, C. Cerjan, M.D. Feit, R. Friesner, A. Guldberg, A. Hammerich, G. Jolicard, W. Karrlein, H.-D. Meyer, N. Lipkin, O. Roncero, and R. Kosloff, J. Comp. Phys. **94**, 59 (1991).
 - [23] T. Iitaka, S. Nomura, H. Hirayama, X. Zhao, Y. Aoyagi, and T. Sugano, Phys. Rev. E **56**, 1222 (1997).
 - [24] R.N. Silver and H. Röder, Phys. Rev. E **56**, 4822 (1997).
 - [25] Y.L. Loh, S.N. Taraskin, and S.R. Elliot, Phys. Rev. Lett. **84**, 2290 (2000); *ibid.* Phys.Rev.Lett. **84**, 5028 (2000).
 - [26] H. De Raedt, K. Michielsen, J.S. Kole, and M.T. Figge, in Computer Simulation Studies in Condensed-Matter Physics XV, eds. D.P. Landau et al., Springer Proceedings in Physics, (Springer, Berlin in press).
 - [27] H. De Raedt, K. Michielsen, J.S. Kole, and M.T. Figge, submitted to IEEE Antennas and Propagation, LANL preprint: physics/0208060
 - [28] J.H. Wilkinson, *The Algebraic Eigenvalue Problem*, (Clarendon Press, Oxford, 1965).
 - [29] M. Abramowitz and I. Stegun, *Handbook of Mathematical Functions*, (Dover, New York, 1964).
 - [30] H.F. Trotter, Proc. Am. Math. Soc. **10**, 545 (1959).
 - [31] H. De Raedt and B. De Raedt, Phys. Rev. A **28**, 3575 (1983).
 - [32] M. Suzuki, J. Math. Phys. **26**, 601 (1985); *ibid* **32** 400 (1991).
 - [33] A.J. Chorin, T.J.R. Hughes, M.F. McCracken, and J.E. Marsden, Comm. Pure Appl. Math. **XXXI**, 205 (1978).
 - [34] H. Kobayashi, N. Hatano, and M. Suzuki, Physica A **211**, 234 (1994).
 - [35] H. De Raedt, K. Michielsen, Comp. in Phys. **8**, 600 (1994).
 - [36] A. Rouhi, J. Wright, Computers in Physics **9**, 554 (1995).
 - [37] B.A. Shadwick and W.F. Buell, Phys. Rev. Lett. **79**, 5189 (1997).
 - [38] M. Krech, A. Bunker, and D.P. Landau, Comp. Phys. Comm. **111**, 1 (1998).
 - [39] P. Tran, Phys. Rev. E **58**, 8049 (1998).

- [40] K. Michielsen, H. De Raedt, J. Przeslawski, and N. Garcia, Phys. Rep. **304**, 89 (1998).
- [41] H. De Raedt, A.H. Hams, K. Michielsen, and K. De Raedt, Comp. Phys. Comm. **132**, 1 (2000).
- [42] W.H. Press, B.P. Flannery, S.A. Teukolsky, and W.T. Vetterling, *Numerical Recipes*, (Cambridge, New York, 1986).
- [43] This also explains why the unconditionally stable algorithms $\tilde{U}_2$ and $\tilde{U}_4$ yield more accurate eigenvalue distributions than the Yee algorithm [11].
- [44] The data for small τ , obtained from the Yee algorithm for the case of a current source is an exception. This is due to the ambiguities mentioned in Sec.V.